



JACOB HOLTZ COMPANY

Manufacturers of **CASTERS • STAMPINGS • FURNITURE HARDWARE • LEVELS • GLIDES**



TOLL FREE 1-800-445-4337

www.JACOBHOLTZ.com



In 1949 The Jacob Holtz Company began manufacturing metal stampings and casters in Philadelphia. While many other manufacturing companies seem to have disappeared, Jacob Holtz has continued to grow and expand, moving into it's new headquarters in Lester, Pa in 2007. Exceptional service, world class manufacturing capabilities, global sourcing and our employee's commitment to excellence have fueled the company's growth for the past 60 years.



1949 Jacob Holtz Company Founded

1971 Moved to Philadelphia Facility / began injection molding

1980's began automation process

1990's Opened New Distribution Facility in Hickory, NC

1999 Sold to Osage Industries

2007 moved entire operation from Philadelphia to Lester, PA

2009 Developed Proprietary Composite Bed Frame and Display Caster

1963 First Caster Made

1975 Began Importing Products

1988 Full Automation bed frame caster assembly

2004 Purchased On The Level a Chicago based Company manufacturing mechanical self leveling glides for food service industry

2008 Purchased Table Shox™ a Vancouver based Company manufacturing hydraulic self leveling glides for food service industry



2010 X-CASTER Launched



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

Over 60 Years of Manufacturing Excellence, Unsurpassed Customer Service and

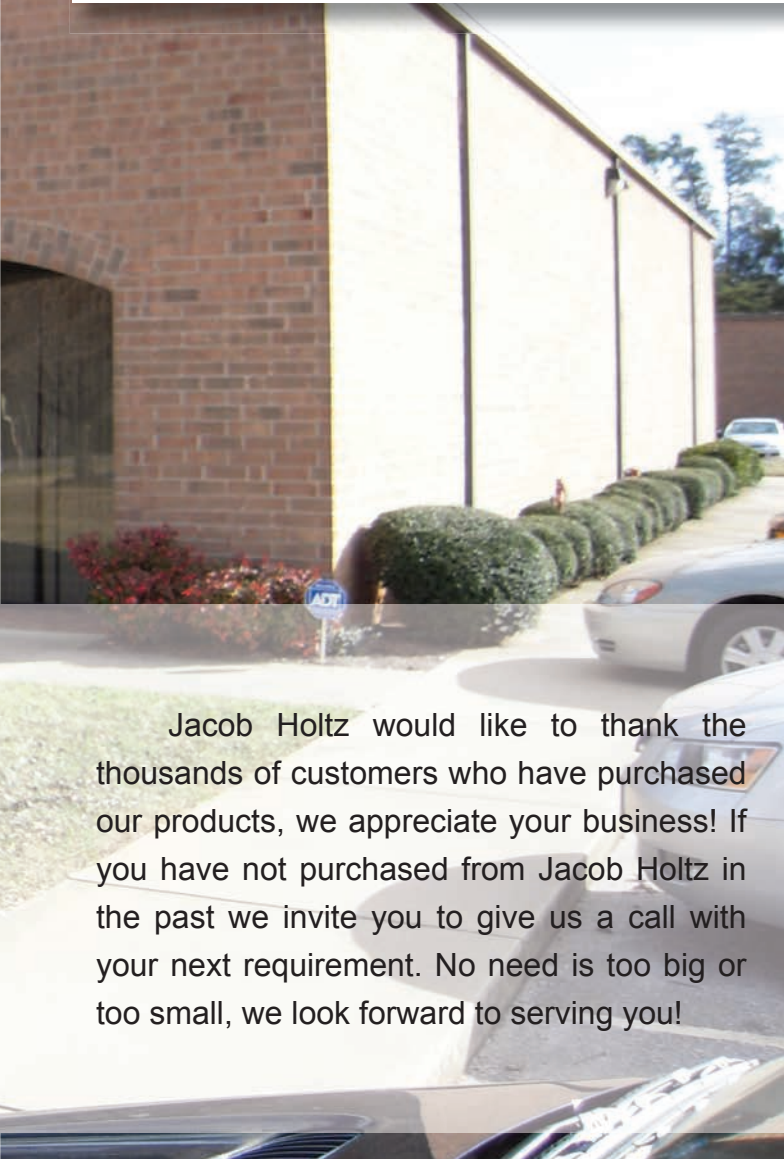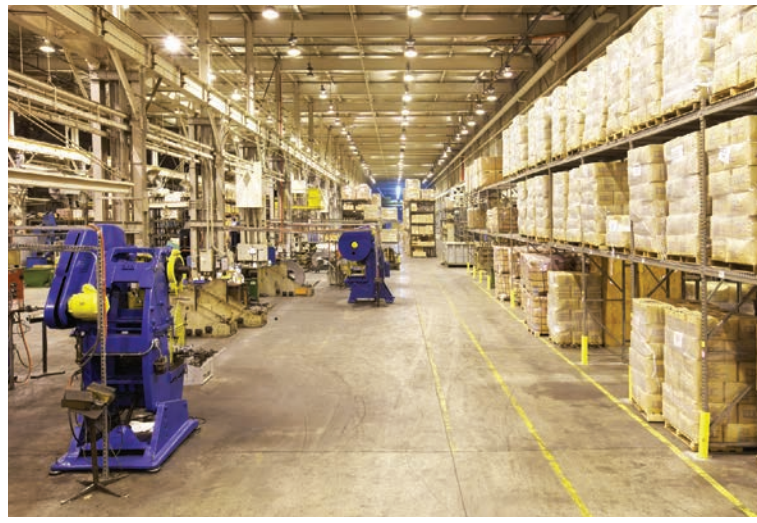

Jacob Holtz would like to thank the thousands of customers who have purchased our products, we appreciate your business! If you have not purchased from Jacob Holtz in the past we invite you to give us a call with your next requirement. No need is too big or too small, we look forward to serving you!

Table Of Contents

<i>Wheel Selection Guide.....</i>	<i>3</i>
<i>Floor Selection Guide</i>	<i>4</i>
<i>Build Your Own Single Wheel Caster</i>	<i>5</i>
<i>Single Wheel Casters CP-GD Series</i>	
<i>Top Plate.....</i>	<i>7</i>
<i>Threaded Stem and Expandable Stem</i>	<i>9</i>
<i>Single Wheel Casters CP-HD Series</i>	
<i>Top Plate.....</i>	<i>11</i>
<i>Single Wheel Casters HR Series</i>	
<i>With Stem</i>	<i>13</i>
<i>Single Wheel Casters HR Series</i>	
<i>Rigid Top Plate.....</i>	<i>15</i>
<i>Swivel Top Plate</i>	<i>16</i>
<i>The X-Caster™ Series</i>	
<i>Why The X-Caster™?</i>	<i>17</i>
<i>Split Wheel & Dual Wheels</i>	<i>19</i>
<i>Swivel & Rigid 3" & 4" Casters.....</i>	<i>20</i>
<i>Twin Wheel Casters</i>	
<i>Hooded</i>	<i>21</i>
<i>Non-Hooded</i>	<i>23</i>
<i>Build Your Own Twin Wheel Caster.....</i>	<i>24</i>
<i>Hooded Ball & Die Cast Metal</i>	
<i>Ball Casters</i>	<i>25</i>
<i>Caster Accessories/Stampings.....</i>	<i>26</i>
<i>SuperLevel</i>	<i>27</i>
<i>TableShox / Glides</i>	<i>28</i>
<i>Domestic Furniture Caster/Stampings</i>	<i>29</i>
<i>Universal Bed Frame Caster.....</i>	<i>30</i>

JACOB HOLTZ WHEEL SELECTION GUIDE (WHEEL CHOICES)

The Jacob Holtz Company Wheels Below are Listed by NSF International



Molded polypropylene, the economical choice, high impact, light weight, minimal rolling resistance, excellent chemical stability



Molded natural and reclaimed rubber, rolls quiet and offers floor protection



Thermoplastic rubber, extremely quiet, excellent floor protection, resist chemicals/solvents, ideal substitute for natural rubber



Polyurethane with polypropylene core, handles higher load capacities, extended tread life, extremely quiet, offers superior floor protection, resist chemicals/solvents



Molded high quality liquid Polyurethane with solid cast iron core, heavy load capacities, extended tread life, extremely quiet, offers superior floor protection



Molded high quality liquid Polyurethane with solid aluminum alloy core, heavy load capacities, extended tread life, extremely quiet, offers superior floor protection



Phenolic reinforced with fibers, heavy load capacity, low rolling resistance, high-impact, resists oil, grease, chemical and solvents



Moldon rubber tread bonded to solid cast iron wheel core, heavy load capacity, quiet, offers superior floor protection



COMPONENT

Listed by
NSF International



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years


www.JacobHoltz.com

WHEELS SOLD INDIVIDUALLY

JACOB HOLTZ WHEEL SELECTION GUIDE

FLOOR SURFACES

Material	Asphalt	Brick	Ceramic Tile & Terrazzo	Unfinished or Sealed Concrete	Epoxy Finishes	Finished Hardwood	Vinyl & Commercial Tile
Polypropylene	✓	✓	✓	✓	✓	✓	✓
Hard Rubber	✓			✓	✓	✓	
Thermoplastic Rubber (TPR)	✓	✓	✓	✓	✓	✓	✓
Thermo Polyurethane on PP Core (PU)	✓	✓	✓	✓	✓	✓	✓
Liquid Polyurethane on Cast Iron and Aluminum Core (PU)	✓	✓	✓	✓	✓	✓	✓
Phenolic	✓	✓		✓	✓	✓	
Moldon Rubber	✓	✓	✓	✓	✓	✓	✓

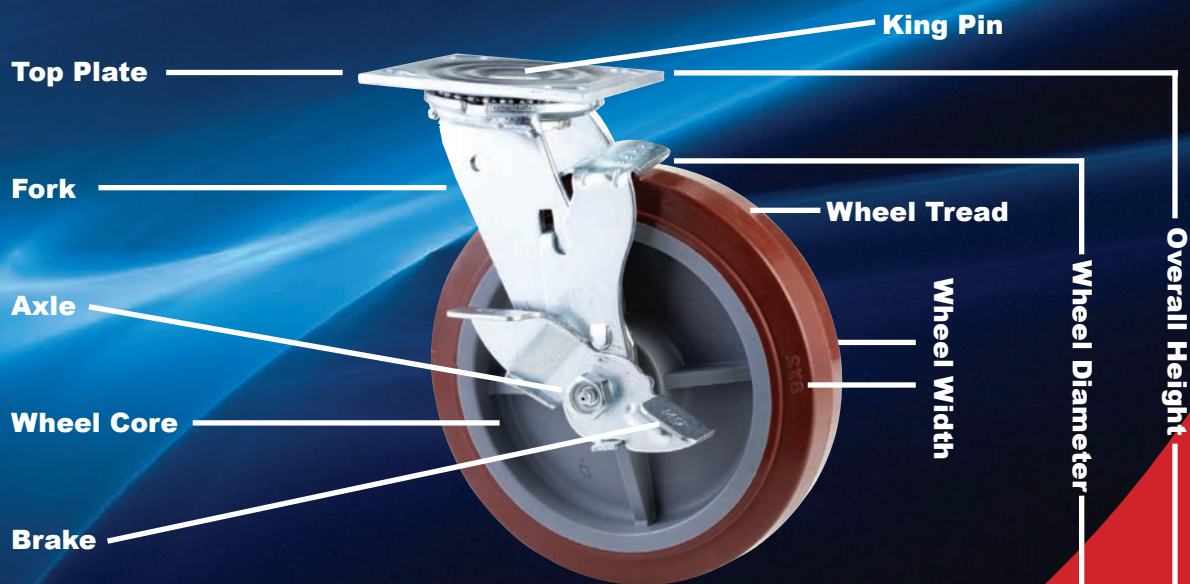


JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com

TOLL FREE: 800-445-4337 • PHONE: 828-328-1003 • FAX: 828-328-1002

BUILD A CASTER THAT WORKS FOR YOU

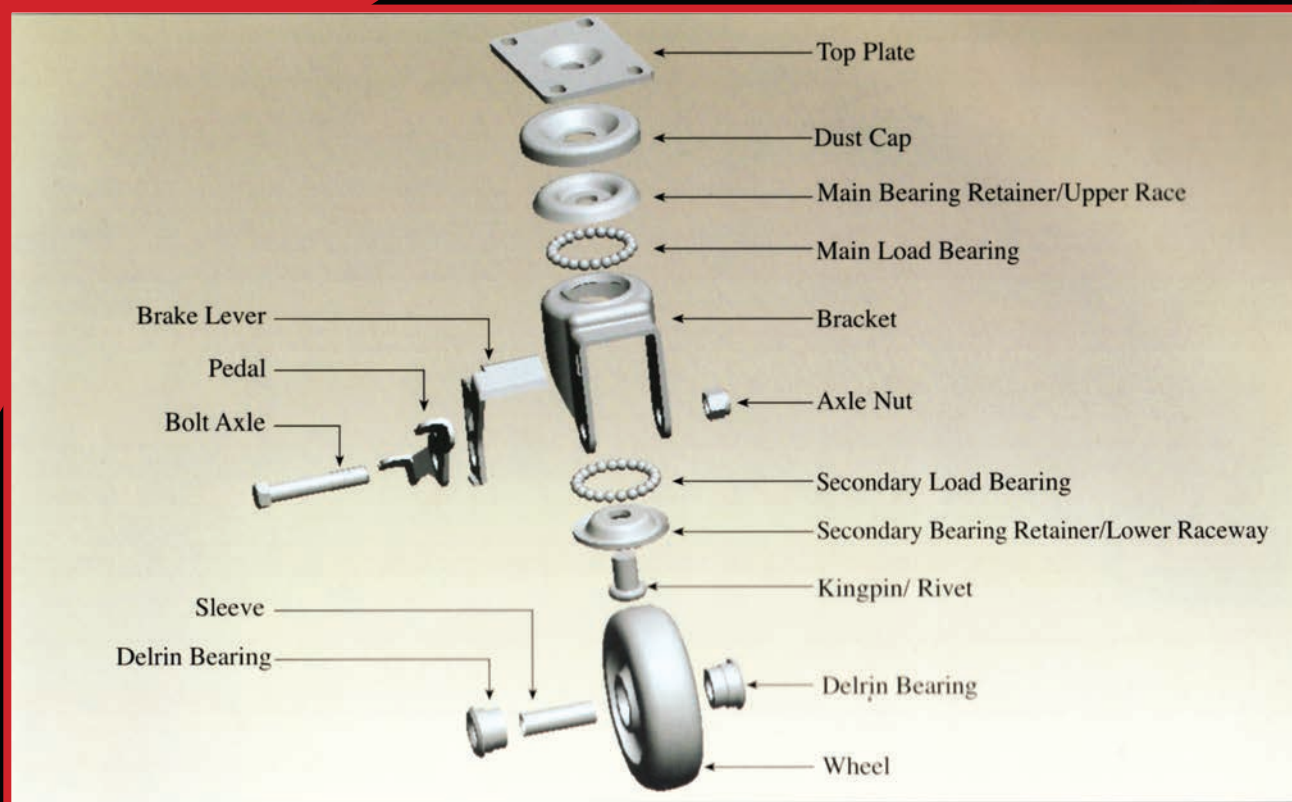

Wheel Dia		Series		Fastening			
25	2-1/2"	CP-GD 2-1/2" 3" 4" 5" Dia.	1-1/4" Width Wheel	04358	Rigid Top Plate 2-1/2" x 3-5/8"	612431	Expandable Stem 3/4" x 2-11/16"
3	3"			05066	Rigid Top Plate 3-1/8" x 4-1/8"	616431	Expandable Stem 1" x 2-11/16"
4	4"			06472	Rigid Top Plate 4" x 4-1/2"	624431	Expandable Stem 1-1/2" x 2-11/16"
5	5"			24058	Top Plate 2-1/2" x 3-5/8"	806161	Threaded Stem 3/8"-16 x 5/8"
6	6"			24460	Top Plate 2-3/4" x 3-3/4"	806241	Threaded Stem 3/8"-16 x 1-1/2"
8	8"	CP-HD 4" 5" 6" 8" Dia.	2" Width Wheel	25066	Top Plate 3-1/8" x 4-1/8"	Finish	
3	3"			26472	Top Plate 4" x 4-1/2"		
4	4"			80816	Threaded Stem 1/2"-13 x 1"	1	Zinc Plated
5	5"			80824	Threaded Stem 1/2"-13 x 1-1/2"		
6	6"			80832	Threaded Stem 1/2"-13 x 2"		



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com

WHAT'S IMPORTANT TO DEFINE YOUR NEEDS?

- Number of Casters Required Per Unit
- Swivel Forks (rotating) or Rigid Forks (fixed)
- Load Capacity (How much will the unit weigh fully loaded – divided by the number of casters)
- Height Requirement (How high will the unit be off the floor)
- Fastening (top plate, threaded stem or other)
- Use (normal conditions for use, debris, temperatures, chemicals / solvents)
- Floor Surface (concrete, tile, asphalt, wood, etc)
- Roll ability (force necessary to move)
- Brake (wheel only or lock for wheel and swivel)



COMPONENT

Listed by
NSF International



25CP-GD-240581-2010-TLB

Wheel Material (Color)		Bearing		Thread Guard		Brake Option	
10	Polypropylene (Black)	1	Sleeve	0	None	TB	Tread Brake
20	Hard Rubber (Black)	2	Nylon	1	Plastic (Grey)	MTL	Top Lock (Metal)
22	Mold On Rubber (Black) With Cast Iron Core (Black)	3	Delrin	2	Metal	NTL	Top Lock (Nylon)
30	TPR (Grey) on PP Core (Grey)	4	Dual Ball			TLB	Total Lock Brake
40	PU (Red) on PP Core (Grey)	5	Single Ball			TLB2	Total Lock Brake (Nylon)
50	PU (Red) on Cast Iron	6	Roller				
60	Cast Iron						
70	Phenolic						



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com




COMPONENT

Listed by
NSF International


TOLL FREE: 800-445-4337 • PHONE: 828-328-1003 • FAX: 828-328-1002

CP-GD SERIES WITH TOP PLATE GENERAL DUTY SWIVEL AND RIGID


Standard



Optional: 22-#2



Optional: 22-#3

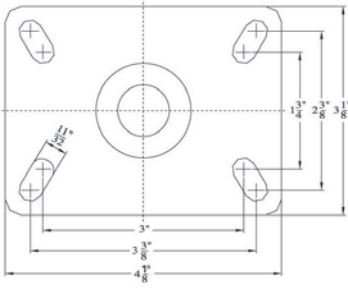

Standard Features

- Zinc Plated for Durability and Longevity
- Swivel Dust Cap
- 3mm Steel Fork Thickness & 4mm Top Plate Thickness
- 2-1/2" x 3-5/8" Standard Swivel and Rigid Top Plate (4mm Steel Thickness)
- 3/8" Solid axle with nylon lock nut
- Listed by NSF International

Brake Options

- TB – Tread Brake (Locks Wheel Only) (Field Installable)
- NTL – Nylon Tread Brake (Locks Wheel Only) (Field Installable)
- TLB2 – Nylon Total Lock Brake (Locks Wheel & Swivel) (Field Installable)

Fork Options

- Full double ball hardened raceway. Better performance and greater durability
- Hollow axle. Greased holes for greater convenience
- Nylon lock nut
- Top Plate 2-3/4" x 3-3/4"
- Top Plate 3-1/8" x 4-1/8"

Wheel Options

- Thread Guards. Available on most models



COMPONENT

Listed by
NSF International



CP-GD Series is a general duty series caster, the most widely used of all. Suitable for indoor applications as well as industrial and material handling equipment. Top Plate fittings are available in different dimensions for both rigid and swivel casters. Brake apparatus of various kinds can be added to your specifications.



COMPONENT
Listed by
NSF International



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com

CP-GD SERIES WITH TOP PLATE

GENERAL DUTY SWIVEL AND RIGID

Wheel Diameter	Wheel Width	Capacity	Wheel Description	Bearing	Swivel Top Plate Caster Part No.	Rigid Top Plate Caster Part No.	Load Height	Swivel Radius
2-1/2"	1-1/4"	180	Hard Rubber	Sleeve	25CP-GD-240581-2010	25CP-GD-043581-2010	3-19/32"	2-13/64"
		170	TPR	Delrin	25CP-GD-240581-3030	25CP-GD-043581-3030		
				Dual Ball	25CP-GD-240581-3040	25CP-GD-043581-3040		
		200	PP	Delrin	25CP-GD-240581-1030	25CP-GD-043581-1030		
				Dual Ball	25CP-GD-240581-1040	25CP-GD-043581-1040		
		175	PU on PP	Delrin	25CP-GD-240581-4030	25CP-GD-043581-4030		
				Dual Ball	25CP-GD-240581-4040	25CP-GD-043581-4040		

Wheel Dia	Wheel Width	Capacity	Wheel Description	Bearing	Swivel Top Plate Caster Part No.	Rigid Top Plate Caster Part No.	Load Height	Swivel Radius
3"	1-1/4"	190	Hard Rubber	Nylon	3CP-GD-240581-2010	3CP-GD-043581-2010	4-1/4"	2-21/32"
		180	TPR	Delrin	3CP-GD-240581-3030	3CP-GD-043581-3030		
				Dual Ball	3CP-GD-240581-3040	3CP-GD-043581-3040		
				Single Ball	3CP-GD-240581-3050	3CP-GD-043581-3050		
		210	PP	Delrin	3CP-GD-240581-1030	3CP-GD-043581-1030		
				Dual Ball	3CP-GD-240581-1040	3CP-GD-043581-1040		
		180	PU on PP	Delrin	3CP-GD-240581-4030	3CP-GD-043581-4030		
				Dual Ball	3CP-GD-240581-4040	3CP-GD-043581-4040		
				Single Ball	3CP-GD-240581-4050	3CP-GD-043581-4050		
			PU on Cast Iron	Roller	3CP-GD-240581-5060	3CP-GD-043581-5060		
4"	1-1/4"	200	Hard Rubber	Nylon	4CP-GD-240581-2010	4CP-GD-043581-2010	5-3/16"	3-5/32"
		190	TPR	Delrin	4CP-GD-240581-3030	4CP-GD-043581-3030		
				Dual Ball	4CP-GD-240581-3040	4CP-GD-043581-3040		
				Single Ball	4CP-GD-240581-3050	4CP-GD-043581-3050		
		250	PP	Delrin	4CP-GD-240581-1030	4CP-GD-043581-1030		
				Dual Ball	4CP-GD-240581-1040	4CP-GD-043581-1040		
		230	PU on PP	Delrin	4CP-GD-240581-4030	4CP-GD-043581-4030		
				Dual Ball	4CP-GD-240581-4040	4CP-GD-043581-4040		
				Single Ball	4CP-GD-240581-4050	4CP-GD-043581-4050		
			PU on Cast Iron	Roller	4CP-GD-240581-5060	4CP-GD-043581-5060		
5"	1-1/4"	220	Hard Rubber	Nylon	5CP-GD-240581-2010	5CP-GD-043581-2010	6-3/16"	3-13/16"
		200	TPR	Delrin	5CP-GD-240581-3030	5CP-GD-043581-3030		
				Dual Ball	5CP-GD-240581-3040	5CP-GD-043581-3040		
				Single Ball	5CP-GD-240581-3050	5CP-GD-043581-3050		
		275	PP	Delrin	5CP-GD-240581-1030	5CP-GD-043581-1030		
				Dual Ball	5CP-GD-240581-1040	5CP-GD-043581-1040		
		250	PU on PP	Delrin	5CP-GD-240581-4030	5CP-GD-043581-4030		
				Dual Ball	5CP-GD-240581-4040	5CP-GD-043581-4040		
				Single Ball	5CP-GD-240581-4050	5CP-GD-043581-4050		
			PU on Cast Iron	Roller	5CP-GD-240581-5060	5CP-GD-043581-5060		



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com



COMPONENT

Listed by
NSF International

TOLL FREE: 800-445-4337 • PHONE: 828-328-1003 • FAX: 828-328-1002

CP-GD SERIES WITH THREADED STEM AND EXPANDABLE STEM

Standard Features

- Zinc Plated for Durability and Longevity
- Swivel Dust Cap
- 3mm Steel Fork Thickness
- 1/2"-13 x 1" Standard Screw Stem
- Standard Expandable Stem 3/4" x 2-11/16"
- 3/8" Solid axle with nylon lock nut
- Listed by NSF International

Brake Options

- TB – Tread Brake (Locks Wheel Only) (Field Installable)
- NTL – Nylon Tread Brake (Locks Wheel Only) (Field Installable)
- TLB2 – Nylon Total Lock Brake (Locks Wheel & Swivel) (Field Installable)

Fork Options

- Full double ball hardened raceway. Better performance and greater durability
- Hollow axle. Greased holes for greater convenience
- Nylon lock nut
- Screw Stem 1/2"-13 x 1-1/2"
- Screw Stem 1/2"-13 x 2"
- Screw Stem 3/8"-16 x 1"
- Screw Stem 3/8"-16 x 1-1/2"
- Expandable Stem 1" x 2-11/16"
- Expandable Stem 1-1/2" x 2-11/16"

Wheel Options

- Thread Guards. Available on most models



COMPONENT

Listed by
NSF International



Jacob Holtz's general duty series, the most widely used. Suitable for indoor equipment as well as medium duty industrial applications. A variety of stem options and various brake apparatus allow for exact combinations to meet your requirements.



COMPONENT
Listed by
NSF International



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com

CP-GD SERIES WITH THREADED STEM AND EXPANDABLE STEM

Wheel Dia	Wheel Width	Capacity	Wheel Description	Bearing	Swivel Threaded Stem Caster Part No.	Swivel Expandable Stem Caster Part No.	Load Height	Swivel Radius
2-1/2"	1-1/4"	180	Hard Rubber	Sleeve	25CP-GD-808161-2010	25CP-GD-612431-2010	3-33/64"	2-13/64"
		170	TPR	Delrin	25CP-GD-808161-3030	25CP-GD-612431-3030		
				Dual Ball	25CP-GD-808161-3040	25CP-GD-612431-3040		
		200	PP	Delrin	25CP-GD-808161-1030	25CP-GD-612431-1030		
				Dual Ball	25CP-GD-808161-1040	25CP-GD-612431-1040		
		175	PU on PP	Delrin	25CP-GD-808161-4030	25CP-GD-612431-4030		
				Dual Ball	25CP-GD-808161-4040	25CP-GD-612431-4040		

Wheel Dia	Wheel Width	Capacity	Wheel Description	Bearing	Swivel Threaded Stem Caster Part No.	Swivel Expandable Stem Caster Part No.	Load Height	Swivel Radius
3"		190	Hard Rubber	Nylon	3CP-GD-808161-2010	3CP-GD-612431-2010	4-1/4"	2-21/32"
		180	TPR	Delrin	3CP-GD-808161-3030	3CP-GD-612431-3030		
				Dual Ball	3CP-GD-808161-3040	3CP-GD-612431-3040		
				Single Ball	3CP-GD-808161-3050	3CP-GD-612431-3050		
		210	PP	Delrin	3CP-GD-808161-1030	3CP-GD-612431-1030		
				Dual Ball	3CP-GD-808161-1040	3CP-GD-612431-1040		
		180	PU on PP	Delrin	3CP-GD-808161-4030	3CP-GD-612431-4030		
				Dual Ball	3CP-GD-808161-4040	3CP-GD-612431-4040		
			PU on Cast Iron	Single Ball	3CP-GD-808161-4050	3CP-GD-612431-4050		
				Roller	3CP-GD-808161-5060	3CP-GD-612431-5060		
4"	1-1/4"	200	Hard Rubber	Nylon	4CP-GD-808161-2010	4CP-GD-612431-2010	5-3/16"	3-5/32"
		190	TPR	Delrin	4CP-GD-808161-3030	4CP-GD-612431-3030		
				Dual Ball	4CP-GD-808161-3040	4CP-GD-612431-3040		
				Single Ball	4CP-GD-808161-3050	4CP-GD-612431-3050		
		250	PP	Delrin	4CP-GD-808161-1030	4CP-GD-612431-1030		
				Dual Ball	4CP-GD-808161-1040	4CP-GD-612431-1040		
		230	PU on PP	Delrin	4CP-GD-808161-4030	4CP-GD-612431-4030		
				Dual Ball	4CP-GD-808161-4040	4CP-GD-612431-4040		
			PU on Cast Iron	Single Ball	4CP-GD-808161-4050	4CP-GD-612431-4050		
				Roller	4CP-GD-808161-5060	4CP-GD-612431-5060		
5"		220	Hard Rubber	Nylon	5CP-GD-808161-2010	5CP-GD-612431-2010	6-3/16"	3-13/16"
		200	TPR	Delrin	5CP-GD-808161-3030	5CP-GD-612431-3030		
				Dual Ball	5CP-GD-808161-3040	5CP-GD-612431-3040		
				Single Ball	5CP-GD-808161-3050	5CP-GD-612431-3050		
		275	PP	Delrin	5CP-GD-808161-1030	5CP-GD-612431-1030		
				Dual Ball	5CP-GD-808161-1040	5CP-GD-612431-1040		
		250	PU on PP	Delrin	5CP-GD-808161-4030	5CP-GD-612431-4030		
				Dual Ball	5CP-GD-808161-4040	5CP-GD-612431-4040		
			PU on Cast Iron	Single Ball	5CP-GD-808161-4050	5CP-GD-612431-4050		
				Roller	5CP-GD-808161-5060	5CP-GD-612431-5060		



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com




COMPONENT

Listed by
NSF International

TOLL FREE: 800-445-4337 • PHONE: 828-328-1003 • FAX: 828-328-1002

CP-HD SERIES TOP PLATE HEAVY DUTY SWIVEL AND RIGID


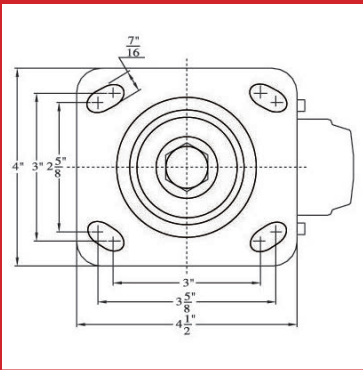


Standard Features

- Zinc Plated for Durability and Longevity
- 6mm Steel Fork Thickness
- 4"x 4-1/2" Swivel Top Plate (6mm Steel Thickness)
- Double Ball Bearing Raceways Heat Treated with Zerk Fitting
- 1/2" Axle With Zerk Fitting and Nylon Lock Nut
- Listed by NSF International

Brake Options

- TB – Tread Brakes (Locks Wheel Only) (Field Installable)
- NTL – Nylon Tread Brake (Locks Wheel Only) (Field Installable)
- TLB2 – Nylon Total Lock Brake (Locks Wheel & Swivel) (Field Installable)

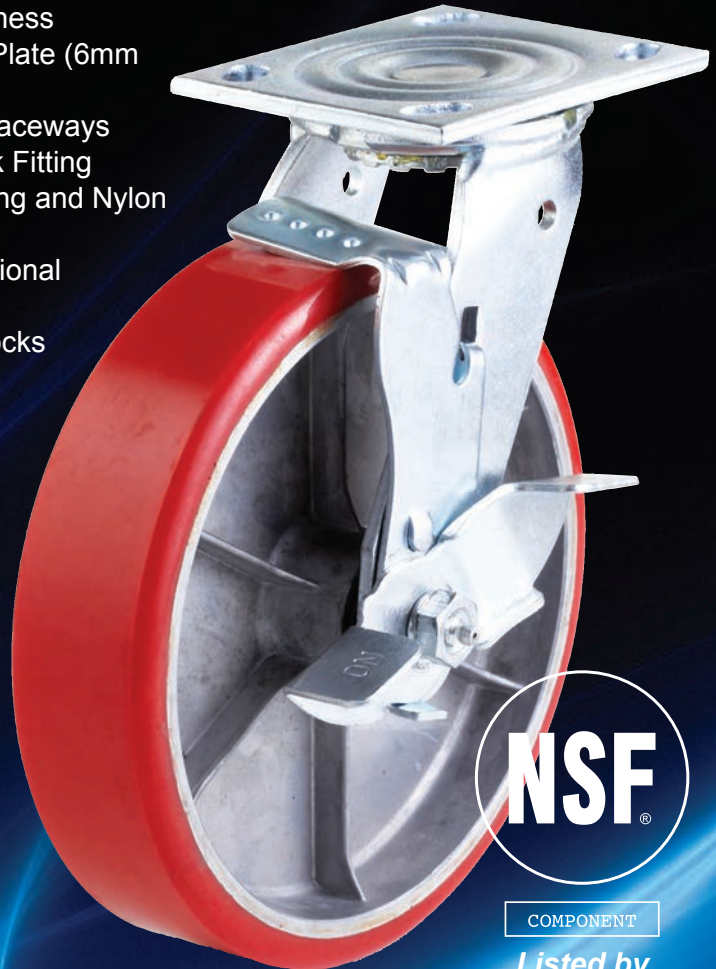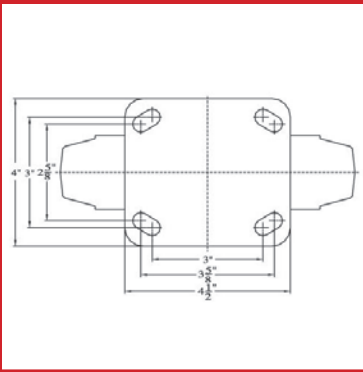

NSF

COMPONENT

Listed by
NSF International

Jacob Holtz's CP-HD Series casters provide heavier weight capacities for the demands within the industrial and commercial setting. This caster offers excellent durability and with a wide variety of wheel combinations available can give you years of service.



COMPONENT
Listed by
NSF International



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com

CP-HD SERIES TOP PLATE HEAVY DUTY SWIVEL AND RIGID

Wheel Dia	Wheel Width	Capacity	Wheel Description	Bearing	Swivel Top Plate Caster Part No.	Rigid Top Plate Caster Part No.	Load Height	Swivel Radius
4"	2"	300	Mold On Rubber	Roller	4CP-HD-264721-2260	4CP-HD-064721-2260	5-5/8"	3-9/16"
		300	TPR	Delrin	4CP-HD-264721-3030	4CP-HD-064721-3030		
				Roller	4CP-HD-264721-3060	4CP-HD-064721-3060		
		600	PP	Delrin	4CP-HD-264721-1030	4CP-HD-064721-1030		
				Roller	4CP-HD-264721-1060	4CP-HD-064721-1060		
		550	PU on PP	Delrin	4CP-HD-264721-4030	4CP-HD-064721-4030		
				Roller	4CP-HD-264721-4060	4CP-HD-064721-4060		
		650	PU on Cast Iron	Roller	4CP-HD-264721-5060	4CP-HD-064721-5060		
		750	Phenolic	Delrin	4CP-HD-264721-7030	4CP-HD-064721-7030		
				Roller	4CP-HD-264721-7060	4CP-HD-064721-7060		

Wheel Dia	Wheel Width	Capacity	Wheel Description	Bearing	Swivel Top Plate Caster Part No.	Rigid Top Plate Caster Part No.	Load Height	Swivel Radius
5"	2"	400	Mold On Rubber	Roller	5CP-HD-264721-2260	5CP-HD-064721-2260	6-1/2"	4-1/4"
		325	TPR	Delrin	5CP-HD-264721-3030	5CP-HD-064721-3030		
				Roller	5CP-HD-264721-3060	5CP-HD-064721-3060		
		650	PP	Delrin	5CP-HD-264721-1030	5CP-HD-064721-1030		
				Roller	5CP-HD-264721-1060	5CP-HD-064721-1060		
		600	PU on PP	Delrin	5CP-HD-264721-4030	5CP-HD-064721-4030		
				Roller	5CP-HD-264721-4060	5CP-HD-064721-4060		
		750	PU on Cast Iron	Roller	5CP-HD-264721-5060	5CP-HD-064721-5060		
6"	2"	800	Phenolic	Delrin	5CP-HD-264721-7030	5CP-HD-064721-7030	7-1/2"	5"
				Roller	5CP-HD-264721-7060	5CP-HD-064721-7060		
		450	Mold On Rubber	Roller	6CP-HD-264721-2260	6CP-HD-064721-2260		
		350	TPR	Delrin	6CP-HD-264721-3030	6CP-HD-064721-3030		
				Roller	6CP-HD-264721-3060	6CP-HD-064721-3060		
		700	PP	Delrin	6CP-HD-264721-1030	6CP-HD-064721-1030		
				Roller	6CP-HD-264721-1060	6CP-HD-064721-1060		
		650	PU on PP	Delrin	6CP-HD-264721-4030	6CP-HD-064721-4030		
8"	2"			Roller	6CP-HD-264721-4060	6CP-HD-064721-4060	9-1/2"	6-1/2"
		800	PU on Cast Iron	Roller	6CP-HD-264721-5060	6CP-HD-064721-5060		
		850	Phenolic	Delrin	6CP-HD-264721-7030	6CP-HD-064721-7030		
				Roller	6CP-HD-264721-7060	6CP-HD-064721-7060		
		475	Mold On Rubber	Roller	8CP-HD-264721-2260	8CP-HD-064721-2260		
		400	TPR	Delrin	8CP-HD-264721-3030	8CP-HD-064721-3030		
				Roller	8CP-HD-264721-3060	8CP-HD-064721-3060		
		750	PP	Delrin	8CP-HD-264721-1030	8CP-HD-064721-1030		
				Roller	8CP-HD-264721-1060	8CP-HD-064721-1060		
		700	PU on PP	Delrin	8CP-HD-264721-4030	8CP-HD-064721-4030		
				Roller	8CP-HD-264721-4060	8CP-HD-064721-4060		
		850	PU on Cast Iron	Roller	8CP-HD-264721-5060	8CP-HD-064721-5060		
		900	Phenolic	Delrin	8CP-HD-264721-7030	8CP-HD-064721-7030		
				Roller	8CP-HD-264721-7060	8CP-HD-064721-7060		



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com



COMPONENT

Listed by
NSF International


TOLL FREE: 800-445-4337 • PHONE: 828-328-1003 • FAX: 828-328-1002

HR SERIES WITH STEM SINGLE WHEEL CASTERS



COMPONENT

Listed by
NSF International

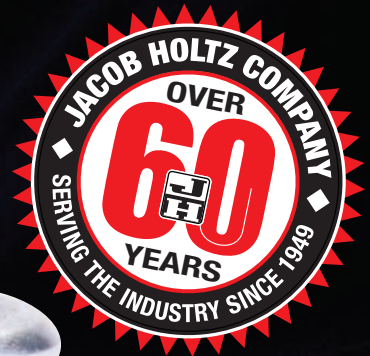

The HR stem series provides an economic and durable solution to multiple institutional and industrial applications and is available in both a General Duty (80 - 100 lb load capacity) and Heavy Duty (200 – 250 lb load capacity) with a single or double raceway. Side and top lock brake options are available. Multiple finishes are offered.



COMPONENT

Listed by
NSF International



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com

HR SERIES WITH STEM SINGLE WHEEL CASTERS

HR Series General Duty-Single Wheel Stem Casters						
Wheel Diameter	Wheel Width	Caster Part No.	Top Fitting	Finish	Wheel Type	Load Capacity (LBS)
1-1/2"	3/4"	15HR-3S-ZN-PP	Friction ring 7/16" x 7/8"	Zinc	POLYPROPYLENE	80
1-1/2"	3/4"	15HR-5A-ZN-PP	Threaded Stem 5/16"-18 X 3/4"	Zinc	POLYPROPYLENE	80
2"	3/4"	2HR-1-ANT-PP	Grip Neck 5/16" X 1-1/2"	Antique Copper	POLYPROPYLENE	90
2"	3/4"	2HR-1-ANT-SRUB	Grip Neck 5/16" X 1-1/2"	Antique Copper	SOFT RUBBER	70
2"	3/4"	2HR-1-ZN-PP	Grip Neck 5/16" X 1-1/2"	Zinc	POLYPROPYLENE	90
2"	3/4"	2HR-1-ZN-SRUB	Grip Neck 5/16" X 1-1/2"	Zinc	SOFT RUBBER	70
2"	3/4"	2HR-3S-ZN-SRUB	Friction ring 7/16" x 7/8"	Zinc	SOFT RUBBER	70
2"	3/4"	2HR-3-ZN-SRUB	Friction ring 7/16" x 1-1/2"	Zinc	SOFT RUBBER	70
2"	3/4"	2HR-7-ZN-SRUB	Threaded Stem 3/8"-16 X 1-1/2"	Zinc	SOFT RUBBER	70
2-1/2"	3/4"	25HR-3-ZN-SRUB	Friction ring 7/16" x 1-1/2"	Zinc	SOFT RUBBER	80
2-1/2"	3/4"	25HR-3S-ZN-SRUB	Friction ring 7/16" x 7/8"	Zinc	SOFT RUBBER	80
2-1/2"	3/4"	25HR-4-ZN-SRUB	Threaded Stem 5/16"-18 X 1/2"	Zinc	SOFT RUBBER	80
2-1/2"	3/4"	25HR-5AHW-ZN-PP	Threaded Stem 5/16"-18 X 3/4"	Zinc	POLYPROPYLENE	90
3"	3/4"	3HR-3-ZN-SRUB	Friction ring 7/16" x 1-1/2"	Zinc	SOFT RUBBER	80
3"	3/4"	3HR-5-ZN-SRUB	Threaded Stem 5/16"-18 X 1"	Zinc	SOFT RUBBER	80
4"	7/8"	4HR-3-ZN-SRUB	Friction ring 7/16" x 1-1/2"	Zinc	SOFT RUBBER	110
4"	7/8"	4HR-3-ZN-TPR	Friction ring 7/16" x 1-1/2"	Zinc	THERMOPLASTIC RUBBER	110
4"	7/8"	4HR-6-ZN-SRUB	Threaded Stem 3/8"-16 X 1"	Zinc	SOFT RUBBER	110
4"	7/8"	4HR-8HW-ZN-SRUB	Threaded Stem 1/2"-13 X 1-1/2"	Zinc	SOFT RUBBER	110

HR Series Heavy Duty-Single Wheel Stem Casters						
Wheel Diameter	Wheel Width	Caster Part No.	Top Fitting	Finish	Wheel Type	Load Capacity (LBS)
3"	1-1/4"	3HR-3-ZN-HD-HRUB	Friction ring 7/16" x 1-1/2"	Zinc	HARD RUBBER	200
3"	1-1/4"	3HR-6-ZN-HD-HRUB	Threaded Stem 3/8"-16 x 1"	Zinc	HARD RUBBER	200
5"	1-1/4"	5HR-3-ZN-HD-HRUB	Friction ring 7/16" x 1-1/2"	Zinc	HARD RUBBER	250

3HR-3-ZN-SRUB-B

- Brake (Options)
- Wheel Type
- Finish
- Top Fitting
- Series
- Wheel Diameter



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com



COMPONENT

Listed by
NSF International

TOLL FREE: 800-445-4337 • PHONE: 828-328-1003 • FAX: 828-328-1002

HR SERIES WITH RIGID TOP PLATE SINGLE WHEEL CASTERS



NSF

COMPONENT

Listed by
NSF International

HR Series

General Duty-Single Wheel Top Plate Rigid Casters

Wheel Diameter	Wheel Width	Caster Part No.	Top Fitting	Plate Size	Hole Spacing	Finish	Wheel Type	Load Capacity (LBS)
2"	3/4"	2HR-2-ZN-R-PP	Top Plate	1-1/2" x 2-1/2"	15/16" X 2-1/8"	Zinc	POLYPROPYLENE	90
2-1/2"	3/4"	25HR-2-ZN-R-HRUB	Top Plate	1-1/2" x 2-5/8"	3/4" x 2-1/16"	Zinc	HARD RUBBER	90

HR Series

Heavy Duty-Single Wheel Top Plate Rigid Casters

Wheel Diameter	Wheel Width	Caster Part No.	Top Fitting	Plate Size	Hole Spacing	Finish	Wheel Type	Load Capacity (LBS)
3"	1-1/4"	3HR-2A-ZN-HD-HRUB-R	Top Plate	2-3/4" X 3-3/4"	1-3/4" X 3"	Zinc	HARD RUBBER	200
3"	1-1/4"	3HR-2-ZN-HD-R-HRUB	Top Plate	3-1/8" X 4-3/16"	2-3/8" X 3-3/8"	Zinc	HARD RUBBER	200
3"	1-1/4"	3HR-2-ZN-HD-R-PP	Top Plate	3-1/8" X 4-3/16"	2-3/8" X 3-3/8"	Zinc	POLYPROPYLENE	200
4"	1-1/4"	4HR-2-ZN-HD-R-HRUB	Top Plate	3-1/8" X 4-3/16"	2-3/8" X 3-3/8"	Zinc	HARD RUBBER	250
6"	2"	6HR-2-ZN-HD-R-PH	Top Plate	4" X 4-1/2"	2-5/8" X 3-5/8"	Zinc	PHENOLIC	1200
8"	2"	8HR-2-ZN-HD-R-PP	Top Plate	4" X 4-1/2"	2-5/8" X 3-5/8"	Zinc	POLYPROPYLENE	1200



COMPONENT
Listed by
NSF International



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com

HR SERIES WITH SWIVEL TOP PLATE SINGLE WHEEL CASTERS



NSF
COMPONENT
Listed by
NSF International

HR Series
General Duty-Single Wheel Top Plate Swivel Casters

Wheel Diameter	Wheel Width	Caster Part No.	Top Fitting	Plate Size	Hole Spacing	Finish	Wheel Type	Load Capacity (LBS)
1-1/2"	3/4"	15HR-2-ZN-PP	Top Plate	1-3/16" x 2"	13/16" X 1-9/16"	Zinc	POLYPROPYLENE	60
1-1/2"	3/4"	15HR-2-ZN-SRUB	Top Plate	1-3/16" x 2"	13/16" X 1-9/16"	Zinc	SOFT RUBBER	40
2"	3/4"	2HR-2-ZN-PP	Top Plate	1-3/16" x 2"	13/16" X 1-9/16"	Zinc	POLYPROPYLENE	90
2"	3/4"	2HR-2-ZN-SRUB	Top Plate	1-3/16" x 2"	13/16" X 1-9/16"	Zinc	SOFT RUBBER	75
2-1/2"	3/4"	25HR-2-ZN-HRUB	Top Plate	1-3/16" X 2"	13/16" X 1-9/16"	Zinc	HARD RUBBER	90
2-1/2"	3/4"	25HR-2C-ZN-HRUB	Top Plate	1-3/4" x 3"	1-1/16" X 2-1/4"	Zinc	HARD RUBBER	90
3"	3/4"	3HR-2-ZN-SRUB	Top Plate	1-3/16" x 2"	13/16" X 1-9/16"	Zinc	SOFT RUBBER	90
3"	3/4"	3HR-2C-ZN-SRUB	Top Plate	1-3/4" x 3"	1-1/16" X 2-1/4"	Zinc	SOFT RUBBER	80
3"	3/4"	3HR-2A-ZN-RED-PU	Top Plate	2-3/4" X 3-3/4"	1-3/4" X 3"	Zinc	RED POLYURETHANE, BLACK POLYPROPYLENE CORE	80
4"	7/8"	4HR-2-ZN-SRUB	Top Plate	2-3/4" X 4"	1-3/4" X 3"	Zinc	SOFT RUBBER	110

HR Series
Heavy Duty-Single Wheel Top Plate Swivel Casters

Wheel Diameter	Wheel Width	Caster Part No.	Top Fitting	Plate Size	Hole Spacing	Finish	Wheel Type	Load Capacity (LBS)
2-1/2"	1-1/4"	25HR-2-ZN-HD-PP	Top Plate	2-3/4" X 3-3/4"	1-3/4" X 3"	Zinc	POLYPROPYLENE	150
3"	1-1/4"	3HR-2A-ZN-HD-PP	Top Plate	2-3/4" X 3-3/4"	1-3/4" X 3"	Zinc	POLYPROPYLENE	200
3"	1-1/4"	3HR-2-ZN-HD-HRUB	Top Plate	3-1/8" X 4-3/16"	2-3/8" X 3-3/8"	Zinc	HARD RUBBER	200
3"	1-1/4"	3HR-2-ZN-HD-PP	Top Plate	3-1/8" X 4-3/16"	2-3/8" X 3-3/8"	Zinc	POLYPROPYLENE	200
4"	1-1/4"	4HR-2A-ZN-HD-HRUB	Top Plate	2-3/4" X 3-3/4"	1-3/4" X 3"	Zinc	HARD RUBBER	250
4"	1-1/4"	4HR-2-ZN-HD-HRUB	Top Plate	3-1/8" X 4-3/16"	2-3/8" X 3-3/8"	Zinc	HARD RUBBER	250
4"	1-1/4"	4HR-2-ZN-HD-PP	Top Plate	3-1/8" X 4-3/16"	2-3/8" X 3-3/8"	Zinc	POLYPROPYLENE	250
5"	1-1/4"	5HR-2-ZN-HD-HRUB	Top Plate	3-1/8" X 4-3/16"	2-3/8" X 3-3/8"	Zinc	HARD RUBBER	250
5"	1-1/4"	5HR-2-ZN-HD-PP	Top Plate	3-1/8" X 4-3/16"	2-3/8" X 3-3/8"	Zinc	POLYPROPYLENE	250
6"	2"	6HR-2-ZN-HD-PH-B	Top Plate	4" X 4-1/2"	2-5/8" X 3-5/8"	Zinc	PHENOLIC	1200
8"	2"	8HR-2-ZN-HD-PP-B	Top Plate	4" X 4-1/2"	2-5/8" X 3-5/8"	Zinc	POLYPROPYLENE	1200

WHY THE X-CASTER™?



205-71-51-WB



205-2XPU-40

X-tra Applications • X-tra Strong • X-tra Savings!

New, Innovative, *Patented Technology* exclusively from the Jacob Holtz Company

- X** Patented Design Delivers Superior Strength & Durability
- X** Market Proven Technology – Over 20 Million in Use!
- X** Strongest Composite Caster on the Market – 80-150 lb Capacity per Caster
- X** Versatile Series – Connections for Every Application & Wheels for Every Floor Type
- X** Engineered for Easy Rolling
- X** COSTS LESS than Traditional Single Wheel Casters




305-2XPP-40

405-2XTPR-R-06

405-2XPP-05-WB

www.theXcaster.com

WHY THE X-CASTER™?

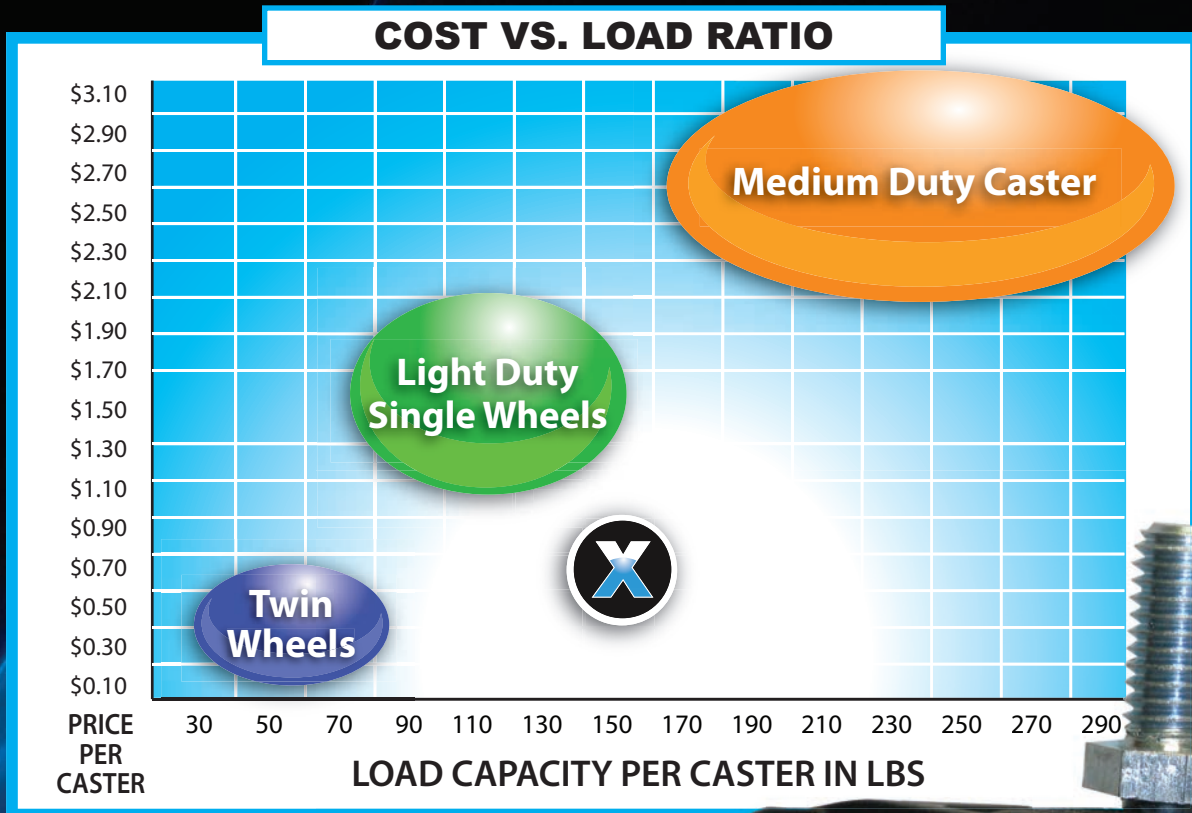

The **X-Caster™** from the Jacob Holtz Company offers the most strength for the buck! The **X-Caster™** supports more weight than traditional light duty twin wheel and single wheel casters. The **X-Caster™** fills a unique void in the caster market – HIGH load capacity at a LOW price. At 80-150 lb weight capacity per caster, no other caster on the market gives you more strength for your dollar.



Another NEW Innovation from the Jacob Holtz Company – the Single Wheel X-Caster™ is Coming Soon! For Inquiries, Give us a Call!

www.theXcaster.com

TOLL FREE: 800-445-4337 • PHONE: 828-328-1003 • FAX: 828-328-1002

X-CASTER™ SERIES

SPLIT WHEEL AND DUAL WHEEL CASTERS

A TOP MOUNT FOR EVERY APPLICATION!



**THREADED
STEM**

Threaded Stems	Top Mount #
5/16"-18 x 1"	22
5/16"-18 x 1-1/2"	24
3/8"-16 x 1"	27
3/8"-16 x 1-1/2"	29
1/2"-13 x 1"	85
1/2"-13 x 1-1/2"	86
1/2"-13 x 2-1/2"	89**

** Special Order.



**TOP
PLATE**

Top Plates	Top Mount #
1-1/2" x 1-1/2"	00
1-1/4" x 2"	04
1-3/4" x 3"	05
2-3/4" x 3-3/4"	06



**FRICTION RING
STEM**

Friction Rings	Top Mount #
Steel Wire 7/16" x 7/8"	40
Brass Brand 7/16" x 7/8"	41
Brass Brand 3/8" x 1"	51
Bass Brand 7/16" x 1-1/2"	61



**GRIP NECK
SOCKET STEM**

Grip Neck	Top Mount #
5/16" x 1-1/2"	10

1-3/7"

Select a Top Mount option from the charts above. Simply insert the Top Mount Number into the blank space in the Base Part Number to complete your part number. To add a brake, add 'WB' to the end of your completed part number.

Example: 2" X-Caster™ with PP Wheels and 1-1/2" x 1-1/2" Top Plate With Brake
205-2XPP-00-WB

X-Caster™ Series							
Wheel Diameter	Wheel Width	Capacity (LBS)	Wheel Description	Base Part Number	Brake Option	Load Height*	Swivel Radius
1-1/2"	3/4"	80	Black PP	155-2XPP-____	WB	2-5/16"	13/16"
			Black HRUB	155-2XHRUB-____			
			Grey TPR On Black PP Core	155-2XTPR-____			
			Grey PU On Black PP Core	155-2XPU-____			
			Black Nylon	155-2XNY-____			
2"	3/4"	150	Black PP	205-2XPP-____		2-45/64"	1-27/32"
			Black HRUB	205-2XHRUB-____			
			Grey TPR On Black PP Core	205-2XTPR-____			
			Grey PU On Black PP Core	205-2XPU-____			
			Black PP Single Split Wheel	205-71-____			
	2"						

*Load Height does not include the height of the top mount.

A WHEEL FOR EVERY FLOOR!



**POLYPROPYLENE
SINGLE SPLIT WHEEL**



**POLYPROPYLENE
OR NYLON**



**THERMOPLASTIC
RUBBER TREAD ON
POLYPROPYLENE CORE**



HARD RUBBER



**POLYURETHANE
TREAD ON
POLYPROPYLENE CORE**

www.theXcaster.com

X-CASTER™ SERIES

SWIVEL AND RIGID 3" & 4" CASTERS



X-Caster™ Series - Swivel

Wheel Diameter	Wheel Width	Capacity (LBS)	Wheel Description	Swivel Base Part Number	Brake Option	Load Height*	Swivel Radius
3"	7/8"	150	Black PP	305-2XPP-____	WB	4"	2-5/16"
			Black HRUB	305-2XHRUB-____			
			Grey TPR on Black PP Core	305-2XTPR-____			
			Grey PU on Black PP Core	305-2XPU-____			
4"			Black PP	405-2XPP-____		5"	2-13/16"
			Black HRUB	405-2XHRUB-____			
			Grey TPR on Black PP Core	405-2XTPR-____			
			Grey PU on Black PP Core	405-2XPU-____			

X-Caster™ Series - Rigid

Wheel Diameter	Wheel Width	Capacity (LBS)	Wheel Description	Top Mount	Rigid Part Number	Load Height*	Swivel Radius
3"	7/8"	150	Black PP	Top Plate 1-3/4" x 3"	305-2XPP-R-05	4"	2-5/16"
			Black PP	Top Plate 2-3/4" x 3-3/4"	305-2XPP-R-06		
			Black HRUB	Top Plate 1-3/4" x 3"	305-2XHRUB-R-05		
			Black HRUB	Top Plate 2-3/4" x 3-3/4"	305-2XHRUB-R-06		
			Grey TPR on Black PP Core	Top Plate 1-3/4" x 3"	305-2XTPR-R-05		
			Grey TPR on Black PP Core	Top Plate 2-3/4" x 3-3/4"	305-2XTPR-R-06		
			Grey PU on Black PP Core	Top Plate 1-3/4" x 3"	305-2XPU-R-05		
			Grey PU on Black PP Core	Top Plate 2-3/4" x 3-3/4"	305-2XPU-R-06		
4"		200	Black PP	Top Plate 1-3/4" x 3"	405-2XPP-R-05	5"	2-13/16"
			Black PP	Top Plate 2-3/4" x 3-3/4"	405-2XPP-R-06		
			Black HRUB	Top Plate 1-3/4" x 3"	405-2XHRUB-R-05		
			Black HRUB	Top Plate 2-3/4" x 3-3/4"	405-2XHRUB-R-06		
			Grey TPR on Black PP Core	Top Plate 1-3/4" x 3"	405-2XTPR-R-05		
			Grey TPR on Black PP Core	Top Plate 2-3/4" x 3-3/4"	405-2XTPR-R-06		
			Grey PU on Black PP Core	Top Plate 1-3/4" x 3"	405-2XPU-R-05		
			Grey PU on Black PP Core	Top Plate 2-3/4" x 3-3/4"	405-2XPU-R-06		

*Load Height does not include the height of the top mount.



www.theXcaster.com

TOLL FREE: 800-445-4337 • PHONE: 828-328-1003 • FAX: 828-328-1002

TWIN WHEEL CASTERS HOODED

NYLON HOODED TWIN WHEEL

Standard Features

- 100% Nylon Body Construction
- Black Color
- Variety of Fastenings
- Load Capacity from 60-100 lbs

Options

- Brake
- Polyurethane Tread

EURO STYLE TWIN WHEEL

Standard Features

- 100% Nylon Body Construction
- Black Color
- Load Capacity 75 lbs
- Meets or exceeds ANSI/BIFMA Specification

Options

- Compression Release Brake
- Compression Brake

ZINC DIE CAST HOODED TWIN WHEELS

Standard Features

- Zinc Die Cast Body and Hood
- Variety of Fastenings
- Load Capacity



Jacob Holtz Company an industry leader in nylon hooded twin wheels, nylon euro twin wheels and zinc die-cast twin wheels servicing the furniture, display/store fixture, medical, and equipment industries from the small entrepreneur to the large International OEM's. Jacob Holtz offers a large selection and inventory to handle your volume needs.



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com

Nylon Hooded Twin Wheel Casters

Part No.	Wheel Diameter	Top Fitting
400-0000	40MM	1-1/2" X 1-1/2" TOP PLATE, BOLT HOLE CENTERS 1" X 1"
400-0010	40MM	5/16" X 1-1/2" GRIP NECK SOCKET STEM
400-0021	40MM	5/16"-18 X 3/4" THREADED STEM
500-0000	50MM	1-1/2" X 1-1/2" TOP PLATE, BOLT HOLE CENTERS 1" X 1"
500-0010	50MM	5/16" X 1-1/2" GRIP NECK SOCKET STEM
500-0014	50MM	3/4" CASTER CLIP, U-CLIP, 1-1/2" LONG X 1-1/4" HIGH, 1/8" THREADED HOLE LOCATED 1/4" DOWN FROM TOP CENTER, WITH SCREWS
500-0020	50MM	5/16"-18 X 1/2" THREADED STEM
500-0021	50MM	5/16"-18 X 3/4" THREADED STEM
500-0022	50MM	5/16"-18 X 1" THREADED STEM
500-0027	50MM	3/8"-16 X 1" THREADED STEM
500-0040	50MM	7/16" X 7/8" FRICTION RING STEM, WIRE RING
500-00XX	50MM	50MM BLACK, NYLON, HOODED, TWIN WHEEL CASTER BODY ONLY
600-0010	60MM	5/16" X 1-1/2" GRIP NECK SOCKET STEM
600-0040	60MM	7/16" X 7/8" FRICTION RING STEM, WIRE RING

Euro Style Nylon Hooded Twin Wheel Casters

Part No.	Wheel Diameter	Top Fitting
500-0040-EU38	50MM	7/16" X 7/8" FRICTION RING STEM, STEEL WIRE RING, 38MM EURO STYLE NECK DIAMETER
500-0040-EU45	50MM	7/16" X 7/8" FRICTION RING STEM, STEEL WIRE RING, 45MM EURO STYLE NECK DIAMETER
550-0040-EU38	55MM	7/16" X 7/8" FRICTION RING STEM, STEEL WIRE RING, 38MM EURO STYLE NECK DIAMETER
550-0040-EU45	55MM	7/16" X 7/8" FRICTION RING STEM, STEEL WIRE RING, 45MM EURO STYLE NECK DIAMETER

Zinc Die Cast Nylon Hooded Twin Wheel Casters

Part No.	Wheel Diameter	Top Fitting
500-2060	50MM	7/16" X 1-1/2" FRICTION RING STEM, BRASS BAND, CHROME FINISH
500-2210	50MM	5/16" X 1-1/2" GRIP NECK SOCKET STEM, ANTIQUE BRASS FINISH
500-2260	50MM	7/16" X 1-1/2" FRICTION RING STEM, BRASS BAND, ANTIQUE BRASS FINISH

JACOB HOLTZ COMPANY LIMITED WARRANTY POLICY

Jacob Holtz casters and products are warranted against defects in material and workmanship for a period of (1) year from the date of the original purchase. Any product found to be defective due to material or workmanship and returned to JHC with prior written authorization, within the warranty period will be repaired or replaced free of charge, excluding freight and installation.

This Limited Warranty does not include any product that has been abused, misused, mishandled, altered, or improperly installed. Jacob Holtz Company's obligation under this Limited Warranty is limited to repair, replacement, or refund of the purchase price at the sole discretion of The Jacob Holtz Company.

This Limited Warranty is provided in lieu of all other warranties, expressed or implied, and all other warranties of merchantability and fitness for a particular purpose, are hereby excluded and disclaimed.



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com

TOLL FREE: 800-445-4337 • PHONE: 828-328-1003 • FAX: 828-328-1002

TWIN WHEEL CASTERS NON-HOODED

Jacob Holtz Company Non-Hooded Nylon Twin Wheel Series casters offer stylish and contemporary looks providing superior load capacities and ease of mobility making them an excellent choice for the display/store fixture, medical, furniture and utility cart applications.

Standard Features

- Nylon Construction
- Nylon Tread Wheel
- Variety of Fastenings

Options

- Brake
- Polyurethane Tread



Part No.	Wheel Diameter	Top Fitting
750-1005	75MM	2-17/32" X 2-3/16" TOP PLATE, BOLT HOLE CENTERS 41MM X 51MM
750-1027	75MM	3/8"-16 X 1" THREADED STEM
750-10XX	75MM	TWIN WHEEL CASTER BODY ONLY
1000-1005	100MM	2-17/32" X 2-3/16" TOP PLATE, BOLT HOLE CENTERS 41MM X 51MM
1000-1027	100MM	3/8"-16 X 1" THREADED STEM, 17MM HEX NUT AT BASE
1000-1060	100MM	7/16" X 1-1/2" FRICTION WIRE RING STEM
1000-10XX	100MM	TWIN WHEEL CASTER BODY ONLY



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com

NEED ANOTHER COMBINATION?

CHOOSE A TOP FITTING AND A CASTER BODY. BUILD YOUR OWN TWIN WHEEL CASTER SPECIFIC TO YOUR REQUIRED NEEDS.



TOP PLATE

38mm x 38mm x 2mm ($1\frac{1}{2}$ x $1\frac{1}{2}$ x .080)
50mm x 30mm x 2.5mm (2 x $1\frac{1}{4}$ x .095)
65mm x 55mm x 3mm ($2\frac{17}{32}$ x $2\frac{3}{16}$ x .115)



THREADED STEM

$\frac{5}{16}$ - 18 x $1\frac{1}{2}$ "	$\frac{3}{8}$ - 16 x 1"
$\frac{5}{16}$ - 18 x $\frac{3}{4}$ "	$\frac{3}{8}$ - 16 x $1\frac{1}{2}$ "
$\frac{5}{16}$ - 18 x 1"	$\frac{1}{4}$ - 20 x $1\frac{1}{2}$ "
$\frac{5}{16}$ - 18 x $1\frac{1}{2}$ "	$\frac{1}{4}$ - 20 x $\frac{3}{4}$ "
$\frac{3}{8}$ - 16 x $1\frac{1}{2}$ "	$\frac{1}{4}$ - 20 x 1"
$\frac{3}{8}$ - 16 x $\frac{3}{4}$ "	$\frac{1}{4}$ - 20 x $1\frac{1}{2}$ "



FRICTION RING STEM

$\frac{7}{16}$ x $\frac{7}{8}$ "
 $\frac{3}{8}$ x 1"
 $\frac{7}{16}$ x $1\frac{1}{2}$ "
Brass Band



SOCKET STEM

Socket stem with metal or plastic socket. Various sizes and styles of metal and plastic inserts available.



FRICTION RING STEM

$\frac{7}{16}$ x $\frac{7}{8}$ "
 $\frac{7}{16}$ x $1\frac{1}{4}$ "
 $\frac{7}{16}$ x $1\frac{1}{2}$ "
Steel Wire



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com

TOLL FREE: 800-445-4337 • PHONE: 828-328-1003 • FAX: 828-328-1002

HOODED BALL & DIE CAST METAL BALL CASTERS

Jacob Holtz Hooded Ball Caster Series are widely used throughout the furniture, display/store fixture and medical industries for their load capacities, roll ability, easy swiveling and overall good looks. This series is an excellent alternative to nylon twin wheels and single wheel caster of the same caliber, when a more decorative look is desired.

Jacob Holtz Zinc Die Cast Ball Caster Series are perfect for furniture, medical, office, and display/store fixture applications offering a classic rich style with outstanding mobility.

HOODED BALL CASTERS

Standard Features

- Double Ball Bearing Raceway
- Metal Hood
- PVC Ball Material (non-marking)
- 70 to 100 lb Load Capacities

Finishes

- Antique
- English Antique
- Polished Brass
- Chrome

Fastenings

- Socket Stem
- Top Plate
- Threaded Stem
- Grip Ring Stem

Options

- Rubber Ball Material
- PU Ball Material (non-marking)
- Brake (2" only)



DIE CAST METAL BALL CASTERS

Standard Features

- Constructed of Zinc Die Cast Material
- Nylon Tread (non-marking)
- 80 lb Load Capacity


Finishes

- Polished Brass
- English Antique
- Chrome
- Black

Fastenings

- Socket Stem
- Top Plate
- Threaded Stem*
- Grip Ring Stem*

FINISH COMPARISON



English Antique Finish

Antique Finish

*Available upon request.

Part No.	Wheel Diameter	Top Fitting / Finish
15HJ-1-ANT-PVC	1-1/2"	5/16" X 1-1/2" GRIP NECK SOCKET STEM, ANTIQUE BRASS FINISH
15HJ-1-BR-PVC	1-1/2"	5/16" X 1-1/2" GRIP NECK SOCKET STEM, BRIGHT BRASS FINISH
15HJ-1-CH-PVC	1-1/2"	5/16" X 1-1/2" GRIP NECK SOCKET STEM, CHROME FINISH
15HJ-1-EA-PVC	1-1/2"	5/16" X 1-1/2" GRIP NECK SOCKET STEM, ENGLISH ANTIQUE FINISH
15HJ-2-ANT-PVC	1-1/2"	1-3/16" X 2" TOP PLATE, BOLT HOLE CENTERS 13/16" X 1-9/16", ANTIQUE BRASS FINISH
15HJ-2-CH-PVC	1-1/2"	1-3/16" X 2" TOP PLATE, BOLT HOLE CENTERS 13/16" X 1-9/16", CHROME FINISH
15HJ-2-EA-PVC	1-1/2"	1-3/16" X 2" TOP PLATE, BOLT HOLE CENTERS 13/16" X 1-9/16", ENGLISH ANTIQUE FINISH
15HJ-9-CH-PVC	1-1/2"	3/8" X 1" FRICTION RING STEM, WIRE RING, CHROME FINISH
2HJ-1-ANT-PVC	2"	5/16" X 1-1/2" GRIP NECK SOCKET STEM, ANTIQUE BRASS FINISH
2HJ-1-BR-PVC	2"	5/16" X 1-1/2" GRIP NECK SOCKET STEM, BRIGHT BRASS FINISH
2HJ-1-CH-PVC	2"	5/16" X 1-1/2" GRIP NECK SOCKET STEM, CHROME FINISH
2HJ-1-EA-PVC	2"	5/16" X 1-1/2" GRIP NECK SOCKET STEM, ENGLISH ANTIQUE FINISH
2HJ-2-ANT-PVC	2"	1-3/16" X 2" TOP PLATE, BOLT HOLE CENTERS 13/16" X 1-9/16", ANTIQUE BRASS FINISH
2HJ-2-BR-PVC	2"	1-3/16" X 2" TOP PLATE, BOLT HOLE CENTERS 13/16" X 1-9/16", BRIGHT BRASS FINISH
2HJ-2-CH-PVC	2"	1-3/16" X 2" TOP PLATE, BOLT HOLE CENTERS 13/16" X 1-9/16", CHROME FINISH
2HJ-2-EA-PVC	2"	1-3/16" X 2" TOP PLATE, BOLT HOLE CENTERS 13/16" X 1-9/16", ENGLISH ANTIQUE FINISH
2HJ-3-CH-PVC	2"	7/16" X 1-1/2" FRICTION RING STEM, BRASS BAND, CHROME FINISH
2HJ-3-EA-PVC	2"	7/16" X 1-1/2" FRICTION RING STEM, BRASS BAND, ENGLISH ANTIQUE FINISH
2HJ-3S-CH-PVC	2"	7/16" X 7/8" FRICTION RING STEM, STEEL WIRE RING, CHROME FINISH

Part No.	Wheel Diameter	Top Fitting
2HK-1-BLK	2"	5/16" X 1-1/2" GRIP NECK SOCKET STEM
2HK-1-EA	2"	5/16" X 1-1/2" GRIP NECK SOCKET STEM
25HK-2-EA	2-1/2"	1-1/2" X 1-1/2" SQUARE TOP PLATE, BOLT HOLE CENTERS 1" X 1"

CASTER ACCESSORIES/STAMPINGS



Jacob Holtz offers the widest selection of metal stampings for the furniture, industrial and display industries. With hundreds of different parts in various sizes and gauges we offer a variety of apron leg brackets, ell brackets, z brackets and mounting brackets with and without glides. Other standard parts include caster clips, leg plates, mending plates and metal glide cups.



SMCB-716-ZP



CMCB-716-ZP




600-14-ZP



NI-14-516-TAPPED-ZP




512-16-ZP

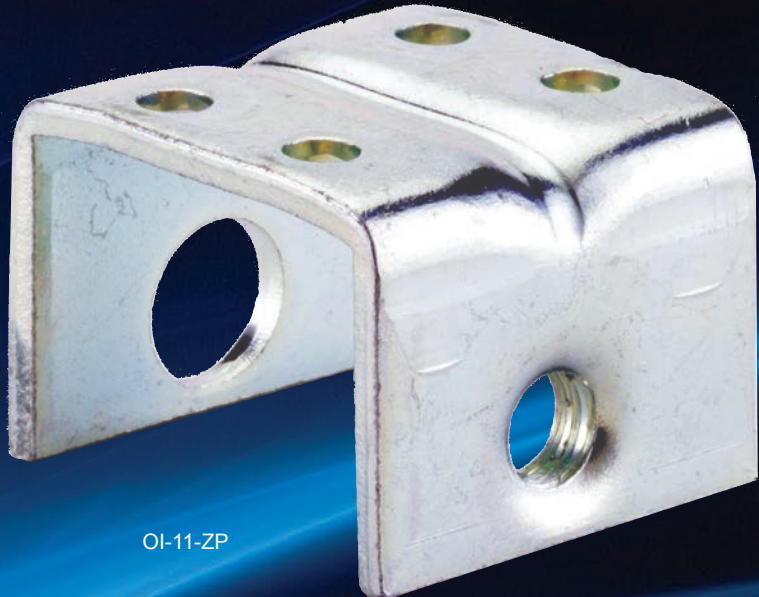


OI-11-ZP

Sockets and Brackets are a perfect accessory designed to hold caster stem fittings. Ideal for inserting stem casters into tubular legs or welded to angle iron and channel.

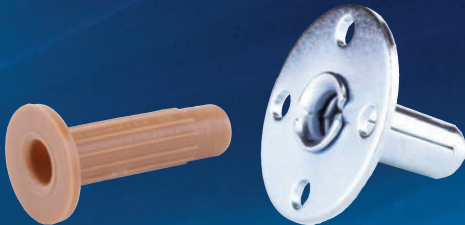

1161-2-TAN

MS-716-ZP-W-FLG

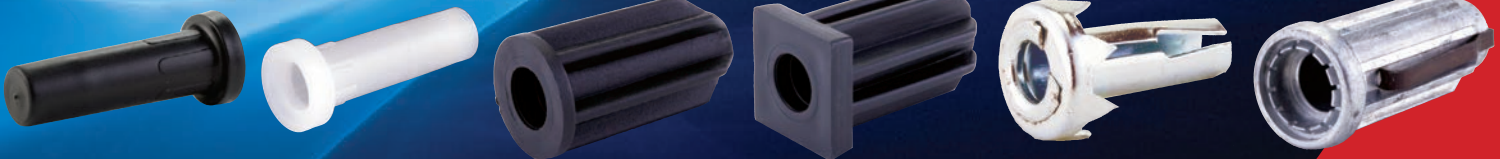

1255-4-BLK


1255-4-NAT

1158-716-BLK


1120-716-BLK

SGNS34-ZP

1159-CAST



1166-3/8-BLK



1168-.429-BLK



END CAP-1.5



KEYHOLE PLUG

STOP THE WOBBLE WITH OUR

**Two solutions to a restaurant owner's biggest complaint, tables that rock.
Established and proven technologies manufactured by Jacob Holtz.
Accept no substitute!**



*Custom Superlevels Can Be Made To Order With Various
Thread Sizes And Connecting Hardware - Please Contact
Us To Quote!*

Features:

- Easy to install
- Automatically re-adjust each time the table is moved
- Keep all contact points touching the floor
- Correct for uneven or irregular surfaces
- Correct for variation in table base
- Unique plastic composite and ramp mechanism
- Lower profile
- Adjusts up to 1/4"
- Corrosion resistant - use indoors or outdoors
- Built to last: nylon and impact resistant polypropylene combined with heat treated stainless steel spring
- 500 lb load capacity per set of 4



Screw mount for
almost any table

Part No.	Packaging	Base Diameter	Installed Height	Description
SL2-14	Individual Glides Available Or 500 Per Box	1.28"	.93"	Superlevel 1/4"-20 Thread
SL2-14-4PK	4 Pack Blue Golf Boxes Available Or 200 Per Carton (800 Total Glides)	1.28"	.93"	Superlevel 1/4"-20 Thread In 4 Pack Blue Golf Box
SL2-POPDISPLAY	Display Box Holding 18-4 Pack Golf Boxes (72 Glides)			Superlevel Point Of Purchase Printed Counter Display



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com

AUTOMATIC SELF-ADJUSTING GLIDES!



Features:

- Easy to install
- Automatically re-adjust each time the table is moved
- Keep all contact points touching the floor
- Correct for uneven or irregular surfaces
- Correct for variation in table base
- Hydraulic mechanism
- Automatically adjusts to 5/16"
- Sturdy construction - steel, polyurethane, and impact resistant nylon
- Swivel feature for increased stability
- Use indoors and outdoors (with cap)
- 400 lb load capacity per set of 4

Part No.	Packaging	Base Diameter	Installed Height	Description
01-1/4-20	Individual Glides in 288 piece carton OR 4 pack Red Golf Box	1.5"	1.15"	Table Shox - 1/4"-20 Thread
01-5/16-18	Individual Glides in 288 piece carton OR 4 pack Red Golf Box	1.5"	1.15"	Table Shox - 5/16"-18 Thread
01-3/8-16	Individual Glides in 288 piece carton OR 4 pack Red Golf Box	1.5"	1.15"	Table Shox - 3/8"-16 Thread
01-M6	Individual Glides in 288 piece carton OR 4 pack Red Golf Box	1.5"	1.15"	Table Shox - 6MM Metric Thread
01-M8	Individual Glides in 288 piece carton OR 4 pack Red Golf Box	1.5"	1.15"	Table Shox - 8MM Metric Thread
01-M10	Individual Glides in 288 piece carton OR 4 pack Red Golf Box	1.5"	1.15"	Table Shox - 10MM Metric Thread
72-1/4-20	Display Box holding 18-4 Pack Golf Boxes (72 Glides)			Table Shox Point of Purchase Printed Counter Display
UMBRELLA CAP-XX	96 caps per bag, 960 per box			Umbrella Cap with hole to fit each Specific Table Shox Part Number

Table Shox also available in 1" screw length and can be produced with any custom connecting hardware, including socket stems or special threads - please contact us to quote!

Adjustable Glides

Jacob Holtz also manufactures and supplies a full line of standard adjustable glides and levelers suitable for office, furniture, point of purchase (POP) display racks, or other similar applications. Available in a variety of stem options, base materials, and thicknesses.



Serving the Industry for over 60 Years

www.JacobHoltz.com


TOLL FREE: 800-445-4337 • PHONE: 828-328-1003 • FAX: 828-328-1002

DOMESTIC FURNITURE CASTERS/GLIDES

Casters and Glides are manufactured in the U.S.A. with up to 125 lb load capacity. Superior quality. Available from stock for immediate delivery. Casters come with brown or white wheel color. Glides have a natural nylon cap. Additional color and plating combinations are available upon request.



BG-2.25 X 4.5-ZP BG-2.25 X 1/2 STEM-ZP

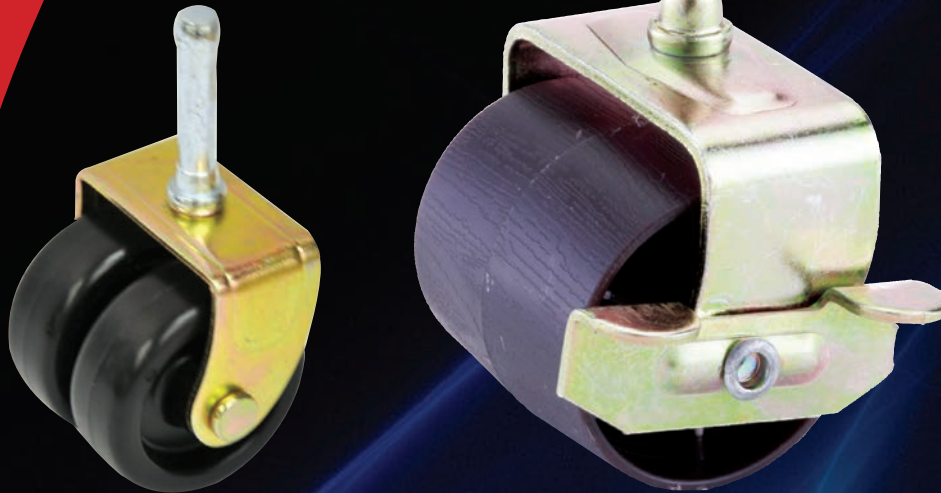

271-71-2X-4

281-80-4-WB



171-80-4

281-87-4



**BAGGING OPTIONS
NOW AVAILABLE!**

Largest Bed Frame Caster Manufacturer in America!

Part No.	Wheel Diameter	Wheel Width	Top Fitting / Finish	Wheel Color	Plating
171-80-4	1-5/8"	5/8"	3/8" X 1-9/16 GRIP NECK SOCKET STEM (4 STEM)	BROWN	YELLOW ZINC
171-87-4	1-5/8"	5/8"	3/8" X 1-9/16 GRIP NECK SOCKET STEM (4 STEM)	WHITE	YELLOW ZINC
172-80-4	1-5/8"	5/8"	3/8" X 1-9/16 GRIP NECK SOCKET STEM (4 STEM)	BROWN	ZINC
172-87-4	1-5/8"	5/8"	3/8" X 1-9/16 GRIP NECK SOCKET STEM (4 STEM)	WHITE	ZINC
272-80-4	2"	1-3/4"	3/8" X 1-9/16 GRIP NECK SOCKET STEM (4 STEM)	BROWN	ZINC
272-87-4	2"	1-3/4"	3/8" X 1-9/16 GRIP NECK SOCKET STEM (4 STEM)	WHITE	ZINC
281-80-4	2"	2-1/4"	3/8" X 1-9/16 GRIP NECK SOCKET STEM (4 STEM)	BROWN	YELLOW ZINC
281-80-4-4PK (Two with no brake and two with brake in poly bag)	2"	2-1/4"	3/8" X 1-9/16 GRIP NECK SOCKET STEM (4 STEM)	BROWN	YELLOW ZINC
281-80-4-6PK (Four with no brake and two with brake in poly bag)	2"	2-1/4"	3/8" X 1-9/16 GRIP NECK SOCKET STEM (4 STEM)	BROWN	YELLOW ZINC
281-80-4-WB (with Brake)	2"	2-1/4"	3/8" X 1-9/16 GRIP NECK SOCKET STEM (4 STEM)	BROWN	YELLOW ZINC
281-87-4	2"	2-1/4"	3/8" X 1-9/16 GRIP NECK SOCKET STEM (4 STEM)	WHITE	YELLOW ZINC
281-87-4-WB (with Brake)	2"	2-1/4"	3/8" X 1-9/16 GRIP NECK SOCKET STEM (4 STEM)	WHITE	YELLOW ZINC

Part No.	Base Diameter	Stem	Plating
BG-2.25 X 1/2-STEM-ZP	2-1/4"	1/2" X 3-1/4"	ZINC
BG-2.25 X 1/2-STEM-ZP-4PK (four packed in a poly bag)	2-1/4"	1/2" X 3-1/4"	ZINC
BG-2.25 X 1/2-STEM-ZP-6PK (four packed in a poly bag)	2-1/4"	1/2" X 3-1/4"	ZINC
BG-2.25 X 4-STEM-ZP	2-1/4"	3/8" X 1-9/16" GRIP NECK (4 STEM)	ZINC
BG-2.25 X 4.5-ZP	2-1/4"	3/8"-16 X4.5" THREADED STEM	ZINC
BG-2.25 X 5-ZP	2-1/4"	3/8"-16 X 5" THREADED STEM	ZINC

www.JacobHoltz.com

TOLL FREE: 800-445-4337 • PHONE: 215-423-2800 • FAX: 215-634-7454

UNIVERSAL BED FRAME CASTER

GREEN

Made from recycled materials and 100% recyclable

STRONGER

Composite materials are 20% stronger than old-fashioned rug runners

FASHIONABLE

Slick, high fashion look makes this a must have on all high end bed frames

NON-MARKING

Impact resistant wheels won't mark flooring

UNIVERSAL

Fits all existing and new frames



Composite materials are 20% stronger than old fashioned rug runners

Patent No.
US D592,490 S
and
Patent No.
US 7,546,662 B2

Wide Brake
Option Available

Impact resistant
polypropylene
wheel



275-71-CG-WB

175-71-CG

275-71-CG

- No plating and made from recycled materials make this 100% recyclable.
- Composite materials are 20% stronger than old-fashioned rug runners.
- Certified to 150 lbs. per caster.
- Slick high fashion look will make this a must have on all high end bed frames.
- Weighing only 84 grams, this caster reduces inbound freight by 56% and offers the manufacturer the ability to ship more bed frames.

- 275-71-CG wheel width of 2" eliminates the need for 1 1/4" and 2 1/4" inventory.
- 175-71-CG wheel diameter of 1 5/8".
- Requires NO change in bed frame design - caster height, stem and off-set are EXACTLY the same as traditional bed frame casters.
- Load tested, dynamic tested, and field tested on a bed to insure functionality in the field.
- Not susceptible to radical changes in steel prices.
- Designed using advanced engineering techniques and finite element testing to insure performance.



JACOB HOLTZ COMPANY

Serving the Industry for over 60 Years

www.JacobHoltz.com

TOLL FREE: 800-445-4337 • PHONE: 828-328-1003 • FAX: 828-328-1002



CASTER

SERIES FROM JACOB HOLTZ COMPANY



JACOB HOLTZ COMPANY

Manufacturers of **CASTERS • STAMPINGS • FURNITURE HARDWARE • LEVELS • GLIDES**

10 Industrial Hwy, MS-6 • Airport Business Complex "B" • Lester, PA 19029

Toll Free: 800-445-4337 • PHONE: 215-423-2800 • FAX: 215-634-7454

PHONE: 828-328-1003 • FAX: 828-328-1002

TOLL FREE 1-800-445-4337

www.JACOBHOLTZ.com